



RED

SET-UP SHEET

NAME _____ RACE _____ DATE _____
 TRACK _____ CITY/COUNTRY _____ TRACK CONDITION _____

AIR TEMP F C
 LAPS _____
 BEST LAP TIME _____ in LAP
 TRACK SIZE
 OPEN MEDIUM TIGHT
 TRACK TRACTION
 HIGH MEDIUM LOW

DIFFERENTIAL

FRONT	BEVEL	REAR
13	PINION	13
43	DIFF.	43

OIL wt.
 100K FRONT 5K REAR

CLUTCH

SHOE BRAND _____
 COMPOUND 2 ALUM 1 CARBON
 SPRING BRAND _____
 TENSION Pos 3 - 1.1 mm
 CLUTCH SHOES 3 SHOE _____

GEARING

	1ST.	2ND.
SPUR GEAR	49 T	46 T
PINION GEAR	14 T	18 T

TIRES

FRONT TYPE Sweep
 COMPOUND 45
 INSERT FOAM White
 REAR TYPE Sweep
 COMPOUND 45
 INSERT FOAM White


ENGINE

TYPE Tesla GT
 PORT 5
 PLUG Tesla 6
 PIPE 21
 NOTE V2

BODY

BRAND Sweep
 TYPE PL1

FRONT

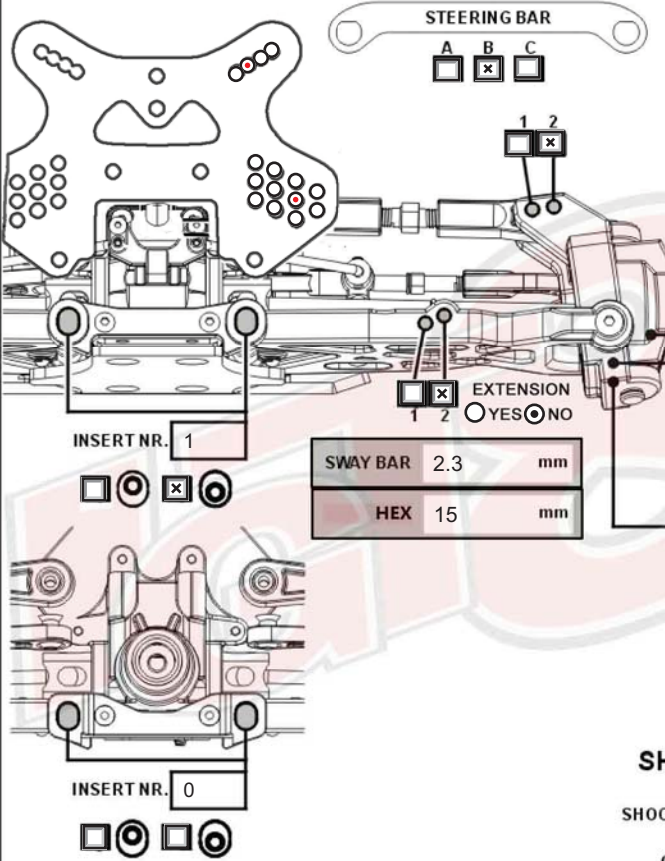

RIDE HEIGHT 9 mm
 DROOP 7 mm
 CAMBER ANGLE 1.5 °
 TOE ANGLE -1 °
 PLASTIC ALUM


FRONT SPINDLE CARRIERS
 PLASTIC ALUM
 STEERING KNUCKLE ARM
 PLASTIC ALUM
 FRONT SPINDLE CARRIERS CASTER
 10° 12° 14°

SHOCK

	FRONT
SHOCK LENGTH	94 mm
OIL wt.	800
PISTON	1.4 mm
SPRING	2.4

SHOCK LENGTH

REAR

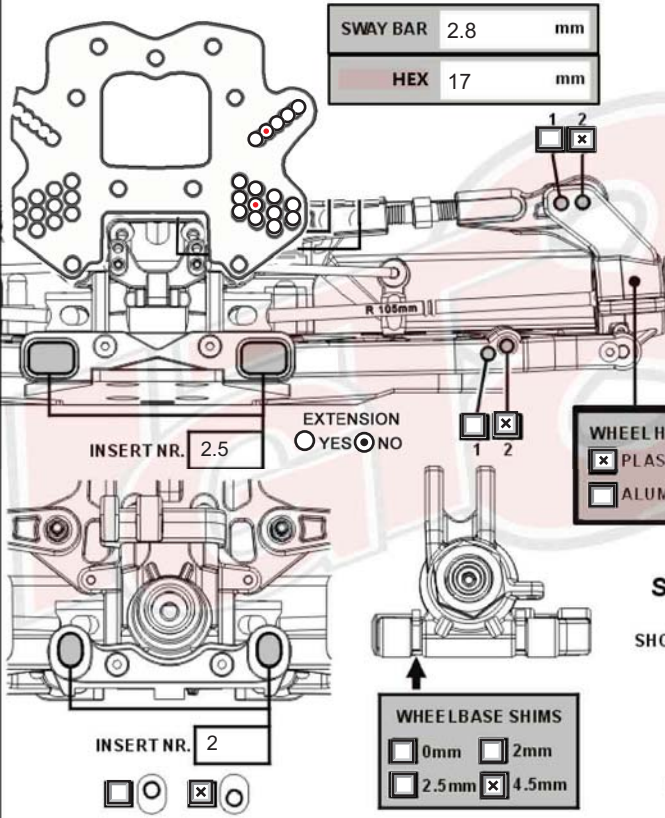

RIDE HEIGHT 10 mm
 DROOP 6 mm
 CAMBER ANGLE 4 °
 TOE ANGLE +2.5 °
 PLASTIC ALUM

SHOCK

	REAR
SHOCK LENGTH	94 mm
OIL wt.	800
PISTON	1.4 mm
SPRING	2.4

SHOCK LENGTH